


PRELIMINARY

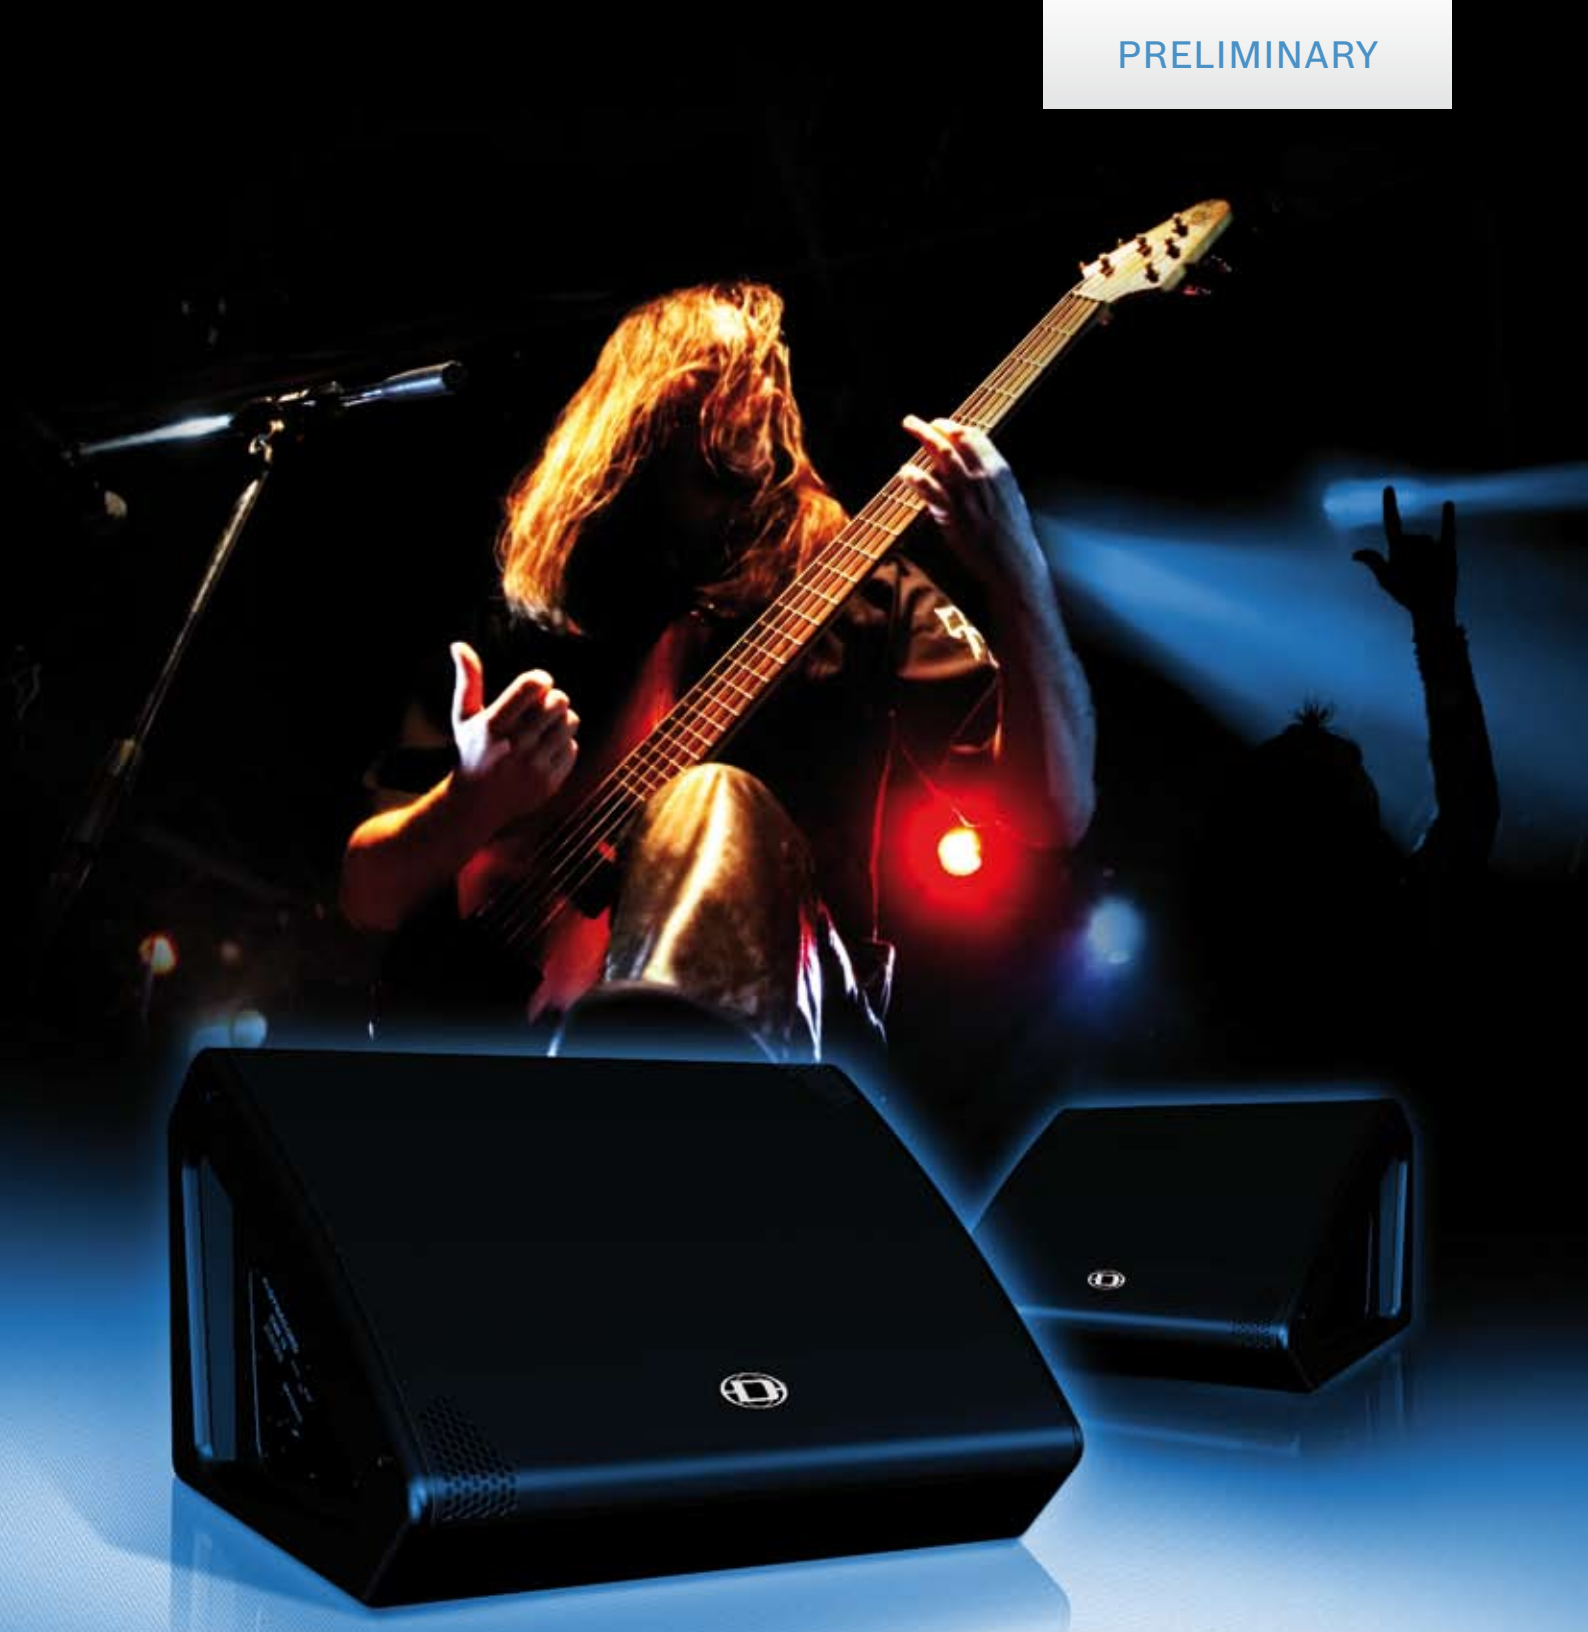

# CXM 15

COAXIAL MONITOR SPEAKER CABINET

Mobile Audio | Concert Sound | Fixed Installation | Pro Entertainment



**DYNACORD**  
GERMAN ENGINEERING EXCELLENCE



## CXM 15

### COAXIAL MONITOR SPEAKER CABINET

- Coaxial Monitor 15"/1.4" 2-Way
- 102dB SPL/1W/1m
- Max. 135dB SPL/1m  
(calculated with peak power)
- Light Weight 19kg
- Switchable to Biamp Mode
- FIR and IIR Presets available

■ **The DYNACORD CXM15 is a light-weight wedge for professional monitoring applications. The DYNACORD DCX15450 2-Way 15"/1.4" transducer uses a coaxially mounted HF unit and can be used in passive or biamped operating mode.**

The acoustic crossover frequency from the 15" low-frequency transducer to the 1.4" mid-high compression driver is around 1.2kHz. The slope of the built-in passive crossover network is 12dB/Octave. An extremely precise definition of the vocals is guaranteed due to the


comparably low crossover frequency and the coaxial transducer design. Power amplifiers are connected to the CXM15 via Speakon connectors NL4MPR.

The pin assignment in passive mode is 1+, 1-. Switching from passive mode to biamped mode is performed by operation of a slider switch. In biamped mode pins 1+, 1- are connected to the 15" low frequency section of the CXM15, pins 2+, 2- are then connected to the 1.4" mid-high-frequency section of the CXM15. The CXM15 is equipped with 3 Speakon connectors wired in parallel. This simplifies the daisy-chaining of multiple wedges and polemounted CXM15 cabinets.


The 1.4" mid-high frequency compression driver is protected against thermal overload with an electronic circuit called VOICE

COIL TRACKING PROTECTION. The protection circuitry exhibits "soft" switching characteristics, so no annoying clicks or pops are audible in case of a thermal overload situation. FIR and IIR presets are available for all operating modes.

The CXM15 is manufactured from birch plywood and therefore extremely resistant against abuse on the road. All cabinet connections are slotted and glued. The surface is painted with a 2-component paint that can easily be renovated if sometimes necessary. A powder-coated steel grille equipped with acoustic foam on the inside protects the transducers against accidental damage. A recessed flange allows easy pole-mount operation and can be exchanged with a M20 inside thread plate for flying applications. Handles have been integrated into both sides of the CXM15.

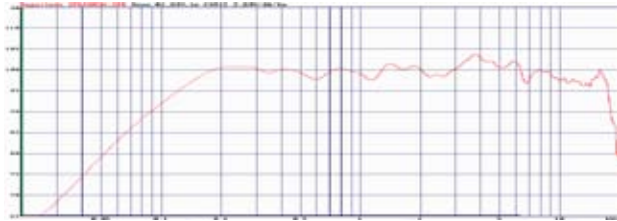


Frequency response

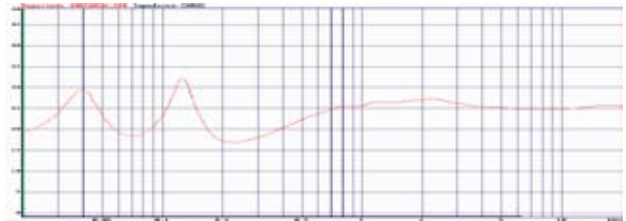

Impedance

General	CXM 15	CXM 15W
<b>Color</b>	Black	White
<b>Order No.</b>	F.01U.123.934	F.01U.123.935
<b>Cabinet</b>	Fullrange	Fullrange
<b>Configuration</b>	Passive 2-Way Switchable to biamped mode	Passive 2-Way Switchable to biamped mode
<b>Nominal impedance</b>	8 Ohms	8 Ohms
<b>Power Handling</b>	Fullrange	Fullrange
<b>Rated Power RMS</b>	450 W	450 W
<b>Program Power</b>	900 W	900 W
<b>Peak Power</b>	1800 W	1800 W
<b>Power Handling</b>	Biamped	Biamped
<b>LF Transducer</b>	400 W	400 W
<b>HF Transducer</b>	50 W	50 W
<b>Sound pressure level</b>		
<b>SPL 2.83 V / 1 m 1 W / 8 Ohm</b>	102 dB SPL	102 dB SPL
<b>Max. SPL 1m</b> (calculated with peak power)	135 dB	135 dB
<b>Frequency range (-10dB)</b>	100 Hz - 18 kHz	100 Hz - 18 kHz
<b>Nominal Coverage Angle</b>	60° Conical	60° Conical
<b>Speaker components</b>		
<b>LF Transducer</b>	DCX 15450 - F01U126730	DCX 15450 - F01U126730
<b>HF Transducer</b>	DCX 15450 - F01U126730	DCX 15450 - F01U126730
<b>Voice Coil tracking protection</b>	Yes	Yes
<b>Connectors Full-Range</b>	1+, 1-	1+, 1-
<b>Wired through</b>	2+, 2-	2+, 2-
<b>Connectors Biamped</b>	Lo 1+, 1-, Hi 2+, 2-	Lo 1+, 1-, Hi 2+, 2-
<b>Wired through</b>	1+, 1-, 2+, 2-	1+, 1-, 2+, 2-
<b>Connector model</b>	Speakon 3x NL4 MPR	Speakon 3x NL4 MPR
<b>Net weight</b>	19 kg (41,88 lbs)	19 kg (41,88 lbs)
<b>Shipping weight</b>	21 kg (46,29 lbs)	21 kg (46,29 lbs)
<b>Enclosure material</b>	Bitch plywood	Bitch plywood
<b>Grille</b>	Powder coated steel, acoustic foam	Powder coated steel, acoustic foam
<b>Handles</b>	integrated handles	integrated handles
<b>Warranty</b>	36 Months	36 Months

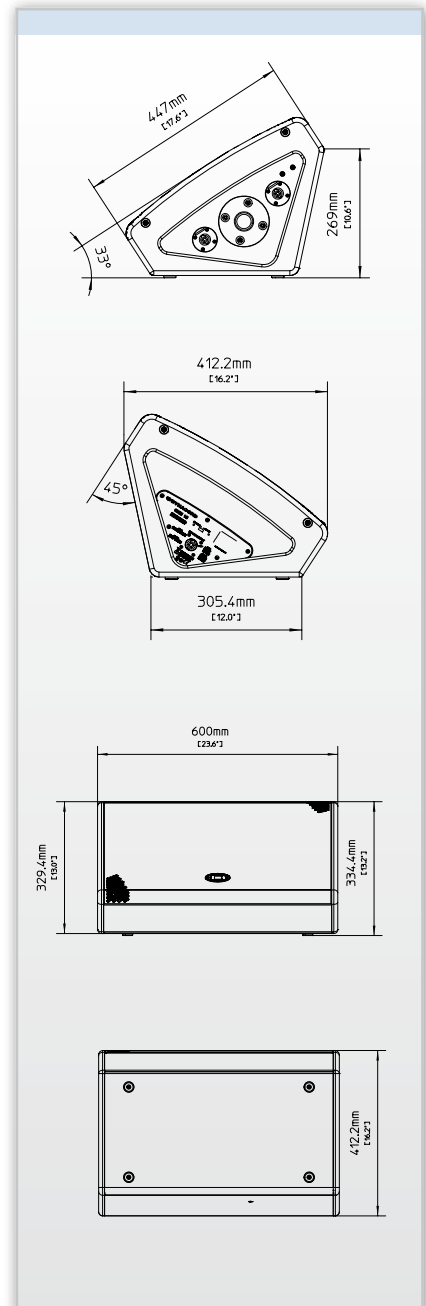

## AMERICAS

### HEADQUARTERS AMERICAS

Bosch Security Systems, Inc.

12000 Portland Ave South,

Burnsville, MN 55337, USA

USA-Ph: 1 800 392 3497

Fax: 1 800 955 6831

Canada-Ph: 1 866 505 5551

Fax: 1 866 336 8467

Latin America-Ph: 1 952 887 5532

Fax: 1 952 736 4212

## EMEA

### HEADQUARTERS EUROPE, MIDDLE -EAST & AFRICA

Bosch Sicherheitssysteme GmbH

Robert-Koch-Strasse 100

85521 Ottobrunn, Germany

Contact & Visitor Address

EVI Audio GmbH

Hirschberger Ring 45

94315 Straubing, Germany

Phone: +49 9421 706 0

Fax: +49 9421 706 265

### FRANCE

EVI Audio France S.A.S

Phone: +33 1 6480 0090

Fax: +33 1 6006 5103

### MIDDLE EAST

Robert Bosch Middle East FZE

Phone: +97 14 212 3300

Fax: +97 14 212 3388

## ASIA & PACIFIC

### HEADQUARTERS APR

Robert Bosch (SEA) Pte Ltd

38 C Jalan Pemimpin

Singapore 577180

Phone: +65 6319 0616

Fax: +65 6319 0620

### AUSTRALIA

Bosch Security Systems Pty Ltd

Phone: +61 2 9683 4752

Fax: +61 2 9890 5928

### CHINA

Telex EVI Audio

(Shanghai) Co., Ltd.

Phone: +86 21 6317 2155

Fax: +86 21 6317 3025

### INDIA

Bosch Limited

Phone: +91 80 4176 8378

Fax: +91 80 4176 8263

### JAPAN

EVI Audio Japan

Phone: +81 3 5316 5020

Fax: +81 3 5316 5030

### THAILAND

Robert Bosch Limited

Phone: +662 639 3111

Fax: +662 631 2030