

# ZX1



**ZX1-90**

PASSIVE / FULL RANGE CABINET  
90° x 50° COVERAGE PATTERN

IMPEDANCE: 8 OHMS  
POWER: 300 WATTS



**Incredible**Sound

# It's your music, your voice, your message.

You need a speaker that can reproduce every note, every inspirational word


and every nuance of your style. Introducing ZX1. Compact, lightweight, yet high performance, ZX1 is a reflection of the needs of the high-speed,

time-crunched, high-tech lifestyle you lead. Its versatility is matched only by your imagination, and its look is pure beauty. So while your audience may not be fully aware

of why you sound incredible, you'll know it's because you

chose the very best...

## ZX1

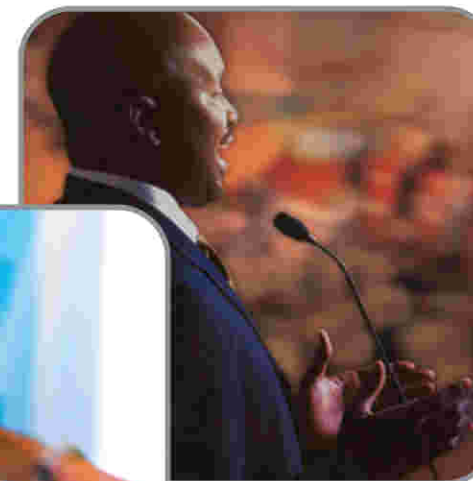

ZX1 offers a wide array of mounting options including an integrated pole mount and removable rubber feet that hide MB mounting studs. Dual NL4 connectors and an ergonomic molded carrying slot make ZX1 perfect for portable music, AV rental and mobile audio applications.

ZX1 shines in monitor wedge applications, especially where the reproduction of vocal frequencies is crucial. Its asymmetrical cabinet design means you simply have to put ZX1 on its side to achieve a 45° monitor angle. And with the ability to rotate its 90° x 50° horn, you can adjust the dispersion pattern to suit your unique application.

	<b>ZX1-90</b> <b>Portable Version</b>	<b>ZX1i-90</b> <b>Fixed Install Version</b>	<b>ZX1i-100</b> <b>Fixed Install Version</b>	<b>ZX1i-100t</b> <b>70v/100v Version</b>
<b>Frequency Response<sup>(1)</sup></b> (-3 dB)	60 Hz - 20 kHz	60 Hz - 20 kHz	60 Hz - 20 kHz	60 Hz - 20 kHz
<b>Frequency Range<sup>(1)</sup></b> (-10 dB)	48 Hz - 20 kHz	48 Hz - 20 kHz	48 Hz - 20 kHz	48 Hz - 20 kHz
<b>Axial Sensitivity<sup>(1)</sup></b>	94 dB (1W/1m)	94 dB (1W/1m)	92 dB (1W/1m)	92 dB (1W/1m)
<b>Maximum Calculated SPL</b>	123 dB	123 dB	121 dB	121 dB
<b>Horizontal Coverage</b>	90° or 50°	90° or 50°	100°	100°
<b>Vertical Coverage</b>	50° or 90°	50° or 90°	100°	100°
<b>System Power Handling</b>	200W Continuous, 400W Program	200W Continuous, 400W Program	200W Continuous, 400W Program	200W Continuous, 400W Program
<b>LF Transducer</b>	EV8L, 8 in (203mm) Driver	EV8L, 8 in (203mm) Driver	EV8L, 8 in (203mm) Driver	EV8L, 8 in (203mm) Driver
<b>HF Transducer</b>	DH2005, 1 in. (25.4mm) Exit Compression Driver	DH2005, 1 in. (25.4mm) Exit Compression Driver	DH2005, 1 in. (25.4mm) Exit Compression Driver	DH2005, 1 in. (25.4mm) Exit Compression Driver
<b>Nominal Impedance</b>	8 Ohms	8 Ohms	8 Ohms	8 Ohms
<b>Pole Mount</b>	Included	N/A	N/A	N/A
<b>Transformer Taps</b>	N/A	N/A	N/A	6.5, 12.5, 25, 50, 100 watts 70/100v
<b>Connectors</b>	Two NL4 Connectors	4-Pin detachable Phoenix style	4-Pin detachable Phoenix style	4-Pin detachable Phoenix style
<b>Overload Protection</b>	Full protection - all modes	Full protection - all modes	Full protection - all modes	Full protection - all modes
<b>Mounting System</b>	Four M8 studs on bottom of speaker	QuickSAM™ Heavy-Duty Strong-Arm Mounting Bracket	QuickSAM™ Heavy-Duty Strong-Arm Mounting Bracket	QuickSAM™ Heavy-Duty Strong-Arm Mounting Bracket
<b>Built-In Monitor Angle</b>	Yes	No	No	No
<b>Available Colors</b>	Black	Black/White	Black/White	Black/White
<b>Included Accessories</b>	None	QuickSAM™ Mount	QuickSAM™ Mount	QuickSAM™ Mount
<b>Dimensions (H x W x D)</b>	17.75" x 11.12" x 10.35" 451mm x 282mm x 263mm	17.75" x 11.12" x 10.35" 451mm x 282mm x 263mm	17.75" x 11.12" x 10.35" 451mm x 282mm x 263mm	17.75" x 11.12" x 10.35" 451mm x 282mm x 263mm
<b>Net Weight</b>	8.4 kg (18.5 lbs)	8.4 kg (18.5 lbs)	8.4 kg (18.5 lbs)	10.4 kg (23.0 lbs)
<b>Shipping Weight</b>	10.2 kg (22.5 lbs)	10.2 kg (22.5 lbs)	10.2 kg (22.5 lbs)	12.3 kg (27.0 lbs)

(1) Halfspace measurements

## The Complete ZX1 Family

The ZX1 is part of a complete compact speaker system product line with models for fixed installation distributed systems.



### Americas

Telex Communications Inc.  
12000 Portland Ave South,  
Burnsville, MN 55337, USA  
USA — Phone: 1-800-392-3497, Fax: 1-800-955-6831  
Canada — Phone: 1-866-505-5551, Fax: 1-866-336-8467  
Latin America — Phone: 1-952-887-5532, Fax: 1-952-736-4212

### Europe, Africa & Middle-East

Germany: EVI Audio GmbH,  
Hirschberger Ring 45, D 94315,  
Straubing, Germany  
Phone: +49 9421 706-0, Fax: +49 9421 706-265

France: EVI Audio France S.A.,  
Parc de Courcerin,  
Allée Lech Walesa,  
F 77185 Lognes, France  
Phone: +33 1-6480-0090  
Fax: +33 1-6006-51-3

UK: ShuttleSound,  
4 The Willows Centre,  
Willow Lane, Mitcham,  
Surrey CR4 4NX, UK  
Phone: +44 208 646 7114  
Fax: +44 208 245 5666



High Tech Sound & Light

Verkoop en  
onderhoud van  
professionele  
geluid- en  
lichtsystemen.

Venweg 13, Denekamp, tel. 0541-351 451, [www.niehoff.nl](http://www.niehoff.nl)

Live For Sound™  
[www.electrovoice.com](http://www.electrovoice.com)

